

CS-C2mini-31WFR

720p Indoor mini Wi-Fi Camera



Introduction

EZVIZ products have been designed for your entertainment, communication, security. When you install the EZVIZ APP on your smartphone or tablet, EZVIZ devices will be connected to the cloud via their QR code and will immediately be online. With EZVIZ you can talk to your loved ones, watch your child's progress when you are away, keep an eye on your home, interact with your four-legged friends, prevent household accidents.

Main Features



HD 720p



Local video storage on a micro SD/SDHC memory card up to 128GB



Wi-Fi Certified 2.4GHZ



Built-in microphone for audio recording




Night vision




Secure cloud recording* (Optional)

Dimension

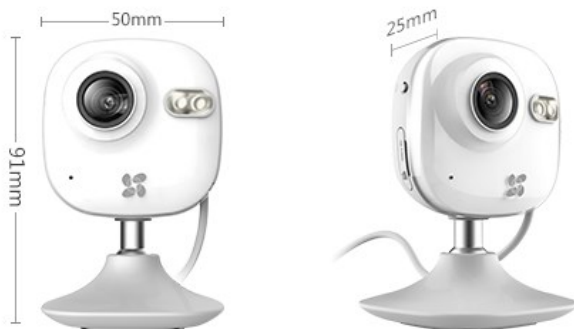

Accessories (Reference)



Power Adaptor



Quick Start Guide



Foam Sticker



Metal plate



Screw Kit

Specifications

| Model | CS-C2mini-31WFR |
|----------------------------|-------------------------------------------------------------------------|
| Camera | |
| Image sensor | 1/3" progressive scan CMOS |
| Minimum Illumination | 0.02Lux @(f/2.2, AGC ON) , 0 Lux with IR |
| Shutter | 1/30s to 1/100,000s |
| Lens | 2.4mm @ f/2.2, angle of view: 115°, opposite angle 130° |
| Lens Mount | M12 |
| Day & Night | IR cut filter |
| DNR | 3D DNR |
| IR Range | Up to 32.8 feet (10m) |
| WDR | Digital WDR |
| Audio | Mircophone |
| Compression | |
| Video Compression | H.264 Main Profile |
| Video Bit Rate | HD, balance, and fluency. Adaptive bit rate. |
| Audio Bit Rate | Adaptive bit rate |
| Image | |
| Max. Resolution | 1280 x 720 (Platform);1280 x 960 (Device) |
| Frame Rate | Max: 25fps Network transmission frame rate: adaptive adjustment |
| Network | |
| Storage | Support micro SD card (≤ 128 GB) |
| Smart Alarm | Smart motion detection |
| One-key configuration | SmartConfig (Wi-Fi one-key configuration) |
| Interface Protocol | Ezviz cloud proprietary protocol |
| General Function | Dual-stream, Mirror image, password protection |
| Wireless parameters | |
| Standard | IEEE802.11b, 802.11g, 802.11n |
| Frequency Range | 2.4 GHz to 2.4835 GHz |
| Channel Bandwidth | Support 20/40MHz |
| Security | 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK |
| Transmission Rate | 11b: 11Mbps, 11g :54Mbps, 11n :150Mbps |
| General | |
| Operating Conditions | 14 °F to 122 °F (-10°C ~ 50°C), Humidity 95% or less (non-condensing) |
| Power Consumption | DC 5V±10% , 3.5W Maximum |
| Dimensions (inch) | 3.58in*1.96in*0.98in(91mm*50mm*25mm) (contain bracket) |
| Weight | 0.24 lb (110 g) |